

Project

Quantity

Item #

Model Specified:

CSI Section 11400

Spacesaver Dual-Temp & Freezer Models/ Self-Contained



Freezer Model
UR30LT



Dual-Temp Model UR48DT
(shown as supplied standard)

Reach-In Models, 24" Deep



Stainless Exterior
& Interior

48" Wide Dual-Temp Model
30" Wide Freezer Model

UR48DT
UR30LT

The Spacesaver product line was designed for use in a variety of applications where both narrow width and shallow depth are required. Their compact footprints are all 24" deep, with model UR30LT being 30" wide and Model UR48DT being 48" wide. They can be built in, or installed freestanding on legs, casters, or a finished base.

Model UR48DT can be supplied with either a stainless steel or clear glass door on the refrigerated section.

Choose from among several optional accessories to complete your Traulsen Spacesaver, such as additional shelves, or even a finished stainless steel base.

Standard Features

- Stainless Steel Exterior And Interior
- Exterior Mounted Digital Thermometer
- Model UR30LT: Full Length Stainless Steel Door With Lock
- Model UR48DT: ¾ Length Stainless Steel Door Above Two Drawers/Refrigerator Section With Full Length Freezer Section Door, Both Doors With Locks
- Adjustable Heavy Duty Chrome Plated Shelves
- Magnetic Snap-In Door Gaskets
- Guaranteed For Life Stainless Steel Horizontal Work Flow Door Handles - (solid doors only)
- Guaranteed For Life Door Hinges
- Self-Closing & Stay Open Door Features
- Stainless Steel Breaker Caps
- Energy Saving Defogger Control
- Automatically Activated Interior Incandescent Lights (light fixture located in refrigerated compartment only of model UR48DT)
- Set Of Four (4) 6" High Stainless Steel Adjustable Legs
- One Piece Lift-Up Louver Assembly
- Automatic Condensate Removal System
- Cord and Plug Attached
- 1 Year Parts And Labor Warranty
- 5 Year Compressor Warranty

Optional Cabinet Configurations

- Clear Glass Refrigerator Door With Lock (model UR48DT only)

Optional Accessories for UR30LT¹

- URACC-SHLF30: One Additional Chrome Plated Shelf
- URACC-BASE30: 4½" High Flush Stainless Steel Base
- URACC-CK1: Set of Four (4) 6" High Casters

Optional Accessories for UR48DT¹

- URACC-SHLFC: One Additional Chrome Plated Shelf for Refrigerator Compartment
- URACC-SHLFD: One Additional Chrome Plated Shelf for Freezer Compartment
- URACC-BASE48: 4½" High Flush Stainless Steel Base
- URACC-CK1: Set of Four (4) 6" High Casters

NOTES:

1= All accessories require field installation.



Listed by Underwriters Laboratories Inc., to U.S. and Canadian safety standards and Listed by NSF International.

Approval: _____



TRAULSEN
4401 BLUE MOUND RD.
PHONE 1 (800) 825-8220
Website: www.traulsen.com

FT. WORTH, TX 76106
FAX-MKTG. 1 (817) 624-4302

SECTION
8-3

Project	Quantity	Item #
Model Specified:		CSI Section 11400

Specifications

Construction, Hardware and Insulation

Unit exterior sides, front, door and interior are constructed of heavy gauge stainless steel. Exterior top, back and bottom are constructed of heavy gauge aluminized steel. Door is equipped with guaranteed for life cam lift, gravity-action, metal glide hinges with stay open feature at 120°. Guaranteed for life, work flow handle is mounted horizontally over recess in door which limits protrusion from door face into aisle ways. Cylinder door locks are provided standard. Model UR48DT is supplied with two drawers on the refrigerated side, these are supplied with two removable anodized aluminum pans per drawer.

Easily removable for cleaning, vinyl magnetic gasket assures tight door seal. Anti-condensate heaters are located behind each door opening.

Cabinet and door contain high density, non-CFC, foamed in place polyurethane insulation.

Models UR30LT and UR48DT are supplied standard with a set of four (4) 6" high adjustable stainless steel legs.

DIMENSIONAL DATA	UR48DT	UR30LT
Net Capacity - Total cu. ft.	28.8 (816 cu l)	17.9 (455 cu l)
Net Capacity - Refrigerator cu. ft.	17.9 (455 cu l)	n/a
Net Capacity - Freezer cu. ft.	10.9 (309 cu l)	17.9 (455 cu l)
Length - Overall in.	48 (121.9 cm)	29 ⁷ / ₈ (75.9 cm)
Depth - Cabinet Only in.	24 (61 cm)	24 (61 cm)
Depth - with Door Open 90° in.	49 ⁵ / ₈ (126 cm)	49 ⁵ / ₈ (126 cm)
Depth - Overall in.	27 (68.5 cm)	27 (68.5 cm)
Clear Door Width - Refrigerator in.	21 ³ / ₄ (55.3 cm)	n/a
Clear Door Width - Freezer in.	13 ³ / ₈ (34.6 cm)	21 ¹ / ₂ (54.6 cm)
Clear Door Height - UR30LT in.		57 ⁵ / ₈ (146.4 cm)
Clear Freezer Door Height - UR48DT in.	57 ⁵ / ₈ (146.4 cm)	
Clear Refrigerator Door Height in. - UR48DT	39 ³ / ₄ (100.9 cm)	
Height - Overall on 6" Legs in.	83 ³ / ₄ (211.5 cm)	83 ³ / ₄ (211.5 cm)
Height - Overall on 4 ¹ / ₂ " Base in.	81 ¹ / ₄ (207.6 cm)	81 ¹ / ₄ (207.6 cm)
Number of Freezer Shelves	5	5
Number of Refrigerator Shelves	4	n/a
Shelf Area - Total sq. ft.	26.8 (2.5 sq m)	15.8 (1.5 sq m)
Shelf Area - Refrigerator sq. ft.	17.3 (1.6 sq m)	n/a
Shelf Area - Freezer sq. ft.	9.5 (.9 sq m)	15.8 (1.5 sq m)

ELECTRICAL DATA (at 115/60/1)

Voltage	115/60/1	115/60/1
Feed Wires with Ground	3	3
Full Load Amperes	11.2	8.4
Wattage ¹	531	354
Defrost Amps (freezer)	6.2	4.7

REFRIGERATION DATA

Refrigerant	R-134a	R-404A
BTU/HR (HP) - Refrigerator ²	848 (1/8 HP)	n/a
BTU/HR (HP) - Freezer ²	1515 (1/8 HP)	2240 (1/8 HP)

CARTON DIMENSIONS Domestic Crated Only

Length - crated in.	63 (160 cm)	35 (88.9 cm)
Depth - crated in.	43 (109.2 cm)	43 (109.2 cm)
Height - crated in.	85 ¹ / ₄ (216.5 cm)	85 ¹ / ₄ (216.5 cm)
Volume - crated cu. ft.	131 (3711 cu l)	71 (2010 cu l)

WEIGHT DATA

Net Weight - uncrated lbs.	470 (214 kg)	370 (168 kg)
Gross Weight - crated lbs.	570 (259 kg)	460 (209 kg)

Refrigeration System


A balanced, top-mounted refrigeration system, using R-134a refrigerant for model UR48DT and R-404A refrigerant for model UR30LT, is located behind a one piece louver assembly for easy access. Automatic condensate removal is provided through use of a bottom mounted electric condensate evaporator. Standard operating temperature for refrigerators is 34-38°F and 0 to -5°F for freezers.

Interior

Models UR30LT is supplied with a standard compliment of five (5) chrome plated shelves. Model UR48DT is supplied standard with five (5) chrome plated freezer shelves and four (4) chrome plated refrigerator shelves.

Warranties

The standard warranty is a five year compressor warranty and a one year parts and labor warranty on all components and the cabinet. Additional warranties are available at extra cost.

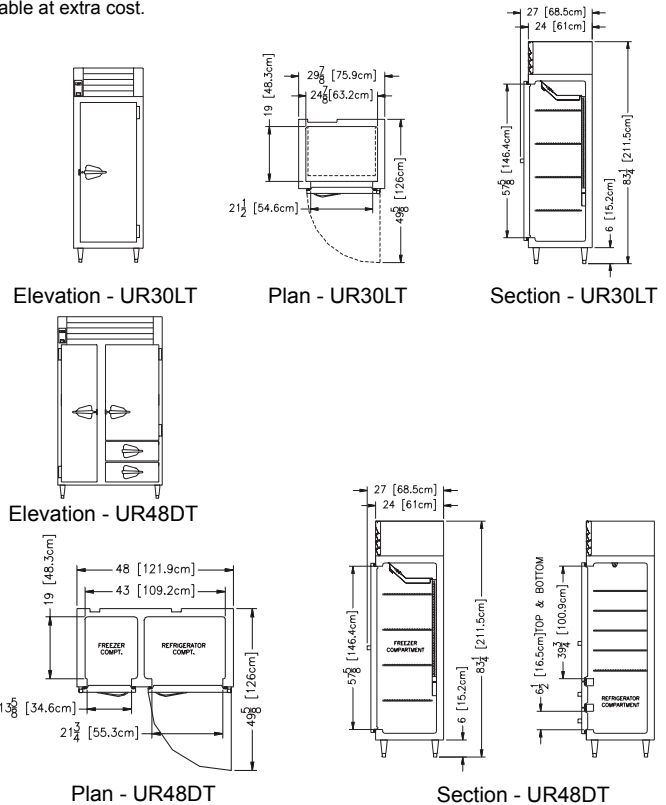

NOTES

NOTE: Figures in parentheses reflect metric equivalents.

1=Wattage is determined by listed amps X listed volts X an average run time of 70% for refrigerators and 80% for freezers.

2=Based on a 90 degree F ambient and 20 degree F evaporator for refrigerators and a 90 degree F ambient and -20 degree F evaporator for freezers .



Supplied With One NEMA 5-15 P Plug

NOTE: When ordering please specify: Voltage, Hinging, Door Size, Options and any additional warranties. For fast order entry: Fax 1 (800) 765-8728.

Continued product development may necessitate specification changes without notice. Part No. TR35818 (revised 1/07)