

## SUBJECT: Required Operating Oil Level – 06E, 06CC Models

DATE: July 7<sup>th</sup>, 2011  
AUTHOR: John Byrnes

PRODUCT       SERVICE & PARTS       GENERAL


Product Name: All 06E and some 06CC models (50 CFM and greater)

### DESCRIPTION

Carlyle has become aware of a number of 06E and 06CC compressors applications applied with oil level controls that do not meet the requirements for all 06E models and some 06CC models (50 CFM and greater).

The correct operating oil level for Carlyle 06E and 06CC models (50 CFM and greater) is between 1/8<sup>th</sup> and 3/8<sup>th</sup> of the sight-glass. Any applied Oil Level control device must be able to control within these limits. Operating the subject compressors with oil levels outside of these limits may affect compressor reliability and could void the warranty.

### RECOMMENDED OIL LEVELS

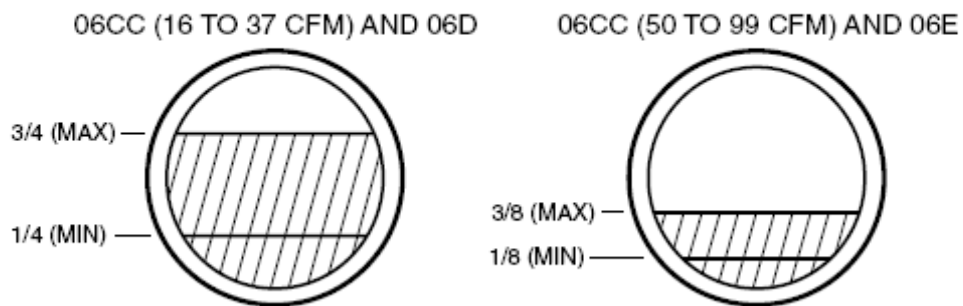

Feel free to contact Application Engineering at 800-GO-CARLYLE (800-462-2759) if you have any questions.